

2MP 22x Lighthunter Network PTZ Dome Camera

IPC6322SR-X22P-D-RU



Key Features

Optics

- Starlight illumination
- 22x optical zoom
- Accurate and fast focusing
- Smart IR, up to 150m (492ft) IR distance

Compression

- 2 Megapixel image
- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- Customized OSD

Network

- ONVIF Conformance

Structure

- Innovative snow-removing functionality
- Intelligent temperature control technology
- 6KV surge protection designed for network interface
- IP66


Specifications

IPC6322SR-X22P-D-RU																
Camera																
Sensor	1/2.8", 2.0 megapixel, progressive scan, CMOS															
Lens	5.2 ~ 114.4mm, AF automatic focusing and motorized zoom lens															
Digital Zoom	16															
Optical Zoom	22															
DORI Distance	<table border="1"> <thead> <tr> <th>Lens (mm)</th> <th>Detect (m)</th> <th>Observe (m)</th> <th>Recognize (m)</th> <th>Identify (m)</th> </tr> </thead> <tbody> <tr> <td>5.2</td> <td>80.7(264.7ft)</td> <td>32.3(105.9ft)</td> <td>16.1(52.9ft)</td> <td>8.1(26.5ft)</td> </tr> <tr> <td>114.4</td> <td>1775.2(5824.1ft)</td> <td>710.1(2329.6ft)</td> <td>355.0(1164.8ft)</td> <td>177.5(582.4ft)</td> </tr> </tbody> </table>	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)	5.2	80.7(264.7ft)	32.3(105.9ft)	16.1(52.9ft)	8.1(26.5ft)	114.4	1775.2(5824.1ft)	710.1(2329.6ft)	355.0(1164.8ft)	177.5(582.4ft)
	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)											
	5.2	80.7(264.7ft)	32.3(105.9ft)	16.1(52.9ft)	8.1(26.5ft)											
114.4	1775.2(5824.1ft)	710.1(2329.6ft)	355.0(1164.8ft)	177.5(582.4ft)												
Angle of View (H)	53.4° ~ 2.7°															
Angle of View (V)	32.3° ~ 1.5°															
Angle of View (O)	60.3° ~ 3.1°															
Shutter	Auto/Manual; shutter time: 1 ~ 1/100000s															
Minimum Illumination	Colour: 0.003 lux (F1.5,AGC ON) 0 lux with IR															
Iris	Auto/Manual; F1.5 ~ F3.8															
Day/Night	IR-cut filter with auto switch (ICR)															
Digital noise reduction	2D/3D DNR															
S/N	>52dB															
IR Range	UP to 150m (492ft)															
Defog	Digital Defog															
WDR	120dB															
Video																
Video Compression	Ultra 265, H.265, H.264, MJPEG															
H.264 code profile	Baseline profile, Main Profile, High Profile															
Frame Rate	Main Stream: 2MP (1920*1080), Max 60fps; Sub Stream: 2MP (1920*1080), Max 60fps; Third Stream: D1 (720*576), Max 60fps															
HLC	Supported															
BLC	Supported															
DIS	Supported															
OSD	Up to 8 OSDs															
Privacy Mask	Up to 24 areas															

ROI	Up to 8 areas
Motion Detection	Up to 4 areas
Smart	
Behavior Detection	Line crossing detection, Intrusion detection, Auto tracking, Master-slave Linkage
Exception Detection And Statistics	Object Moving, Object Left
Recognition	Face detection, Audio detection, Motion detection
Statistical Analysis	People counting
General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
Audio	
Audio Compression	G.711
Two-way audio	Supported
Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 256GB
Network Storage	ANR
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Pan & Tilt	
Pan Range	360° (endless)
Pan Speed	0.1°/s ~ 240°/s
	Preset speed:300°/s
Tilt Range	-15° ~ 90° (auto reverse)
Tilt Speed	0.1° ~ 80°/s
	Preset speed: 80°/s
Number of Presets	1024
Patrol	Preset patrol, route patrol, recorded patrol
Home Position	Supported
Interface	
Audio I/O	Audio cable
	1 Input: impedance 35kΩ; amplitude 2V [p-p]
	1 Output: impedance 600Ω; amplitude 2V [p-p]
Alarm I/O	1/1
Serial Port	N/A
Network	1 RJ45 10M/100M Base-TX Ethernet
Video Output	N/A
General	
Power	DC 12V±10%, PoE (PSE required)
	Power consumption: 4~27.6W

Dimensions (Ø x H)	Ø220 x 369mm (Ø8.7" x 14.5")
Weight	3.4kg (7.5lb)
Working Environment	-40°C ~ 65°C (-40°F ~ 149°F), Humidity: ≤95% RH (non-condensing)
Ingress Resistant	IP66
Reset Button	Supported

Dimensions

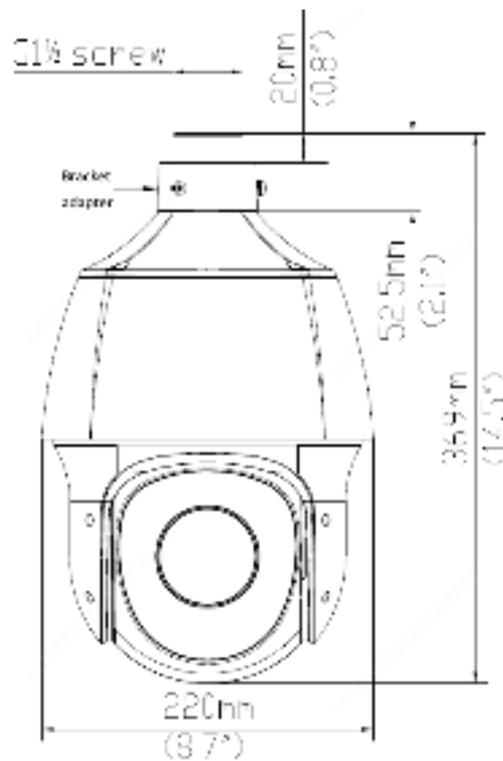

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.